

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 361 577 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
12.11.2003 Bulletin 2003/46

(21) Application number: 02010390.9

(22) Date of filing: 08.05.2002

(51) Int Cl.7: **G11B 27/034**, G11B 27/10,
G11B 27/32, G11B 19/02,
H04N 7/26, H04N 5/781,
H04N 5/775, H04N 5/76

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR
Designated Extension States:
AL LT LV MK RO SI

(71) Applicant: **DEUTSCHE THOMSON-BRANDT**
GMBH
78048 Villingen-Schwenningen (DE)

(72) Inventors:
• **Klausberger, Wolfgang**
30880 Laatzen (DE)

• **Kubsch, Stefan**
31559 Hohnhorst (DE)
• **Ostermann, Ralf**
30167 Hannover (DE)

(74) Representative: **Hartnack, Wolfgang, Dipl.-Ing.**
Deutsche Thomson-Brandt GmbH
European Patent Operations
Karl-Wiechert-Allee 74
30625 Hannover (DE)

(54) Appliance-guided edit-operations in advanced digital video recording systems

(57) The invention comprises an application for recording and the playback of MPEG-2 transport-streams transmitted via DVB-systems with optical discs. Apart from audio- and video-signals, additional information (which describe the content of the DVB-multiplex) will also be transmitted in DVB-SI descriptors. These descriptors correspond to the incoming transport-stream-packets and can be used for comfortable features, like event-triggered start of a recording or automatic generation of play-lists.

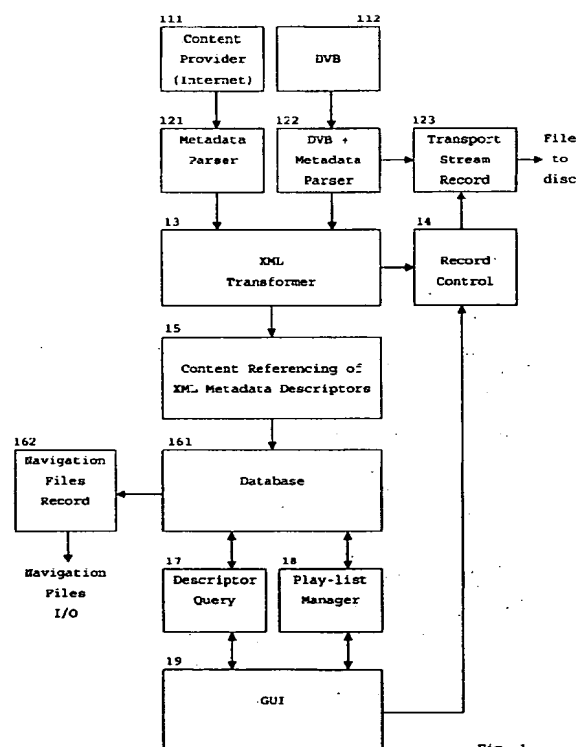


Fig. 1

EP 1 361 577 A1

Description

[0001] The invention provides a method and an apparatus to use signals sent by a broadcast-system for recording and editing a data-stream, the broadcast signals including metadata.

Background

[0002] The terms "Metadata" and "Essence" are defined as following: Metadata are data consisting of essence and of one-or-more links. In the semantic sense, these links describe a link between the essence and other content and can be of different kinds (e. g. an HTML-Link).

Essence consists of any data. These data can contain none, one, or more metadata (e. g. the essence of metadata can contain other metadata; also essence can consist of data, which do not contain any metadata).

[0003] Increased capacities for DVD and DVR-discs will provide the storage of much more movies on one disc than it is possible today. Broadcast-systems like DVB do not only transmit pure essence, but also descriptions about that essence, the so called metadata. This metadata contains all kind of content-information and allows the navigation through the essence.

[0004] VPS is a well-known invention for starting and stopping an analog video-recorder at a certain time. This information is being sent by the broadcaster of analog TV-systems in the Vertical Blanking Intervall (VBI). This principle is not supported by the DVB standard, because the performance of timer controlled recording was planned by EPG mechanisms.

[0005] Prior art only deals with the principles of DVB-related recording media. EP-A-1 103 974 describes a method and an apparatus for recording and reproduction, whereas the principles of starting and stopping a DVB-recorder are not taught.

Invention

[0006] The invention relates to starting and stopping a DVB-recorder, wherein defined signals have to be used. The evaluation and storage of said metadata can be used for new comfortable features for the recording on optical discs.

[0007] The following abbreviations are being used in this invention:

DVB-SI	Digital Video Broadcast Service Information
SPN	Source Packet Number
PTS	Presentation TimeStamp
EIT	Event Information Table
CRID	Content Reference ID
EP	Entry Point

[0008] The structure of a digital recording / reproduction device consists of at least one play-list (i. e. a real play-list or a virtual play-list) and a corresponding clip-information-file.

The play-list describes the play-items of a recorded stream and the points to the in- and out-time positions. The clip-information-file contains also a list of entry-points, which will be extracted from the incoming DVB-video- or DVB-audio-stream-packets. These entry-points lead to stream-packet-positions, where the decoding process can start (I-frame positions).

[0009] The entry-point-packets are:

- I-frame-positions for video,
- Frame-start for audio.

[0010] They are indicated by a source-packet-number (SPN) and registered in the EP-map with a corresponding presentation timestamp (PTS).

[0011] As it is not possible to apply the principles of VPS (Video Programming Service) for the DVB concept, except the use of EPG mechanisms, a new solution was created, which analyses the stream of a DVB-system. Exact timer-signals can be generated for the start-time and the end-time. Also, event-controlled recording can be generated, furthermore play-lists can be automatically generated, and easy edit operations are feasible.

[0012] Descriptions (metadata) about these video- and audio-streams are being transmitted in DVB-SI packets.

[0013] The processing of DVB-transport-streams is the following: The incoming DVB-transport-stream is being parsed and the essence stored on the disc. The corresponding metadata of DVB-SI (service information) and teletext

are extracted and afterwards converted into an XML-descriptor-stream. These can be hereafter stored in a database, which is located e. g. in the recording device. Additional metadata can be received from the Internet, from TV-Anytime-documents, metadata can also be self made, etc. The extracted DVB-SI-metadata can be used during the recording-process and also afterwards in order to ease the user-operations.

[0014] The most important metadata in this invention are transmitted in the DVB-SI event-information-section of the actual transport-stream with the present / following event-information-table (EIT). They provide information about the start-time, the duration, the running-status etc. Extended EIT-descriptors provide information about the title, the language, etc.

[0015] The states of running-status are "not running", "starts in a few seconds" and "running", they represent the status of an event, the status of the program.

[0016] Depending on the chosen strategy, the transition from one running-status to another (e. g. from "starts in a few seconds" to "running") can be used as a trigger-event to start a recording or to create a play-list. The occurrence of this event within the recorded stream can be identified by a Source Packet Number (SPN). After marking the position of the event, the next PTS, which represents an I-Frame, will be used as the IN_time for the PlayItem.

[0017] In order to schedule changes of an event, the DVB standard defines a mechanism to override the running-status of selected events, which are signaled in the Running Status Table (RST).

If the running-status of a current recording is overridden, the new running-status will be used instead of the former running-status.

[0018] A problem to be solved by the invention is to find the start-time and the end-time of specific program-items.

[0019] This problem is solved by the method disclosed in claim 1 and by the apparatus disclosed in claim 8.

[0020] In principle, the inventive method is suited for generating exact timer signals as well as event-controlled recordings: Metadata descriptors are analyzed by runtime or by a resident metadata-archive stored in a digital recorder, characterized in that a resident metadata-archive will contain and update the metadata, wherein following steps are included:

- data-streams including metadata are being received and parsed, wherein the metadata are originated from Content, e.g. Internet and/or from DVB-data, e.g. DVB transport stream;
- metadata originated from Content and metadata originated from DVB are parsed;
- said metadata are being transformed into XML-metadata-descriptors;
- transformed metadata are being used to control a transport stream record and to reference the content of the XML-metadata-descriptors;
- at least some of said metadata-descriptors are stored into a database, e. g. a DBMS-database;
- the metadata-archive is accessed by a query and a browsing mechanism via a graphical user interface;
- the graphical user interface organizes and structures the editing mechanism, which is the play-list manager, and the record control;
- recording the transport stream on a storage medium, e. g. a disc;
- recording the navigation files from the DBMS-database on a storage medium, e. g. a disc.

[0021] Then, the metadata descriptors are analyzed by runtime or by a resident metadata-archive stored in a digital recorder, the apparatus including:

- means to receive and to parse data-streams including metadata from Content, e. g. from Internet and/or means to receive and to parse data-streams from DVB-data, e. g. DVB-transport streams;
- means to transform said metadata into XML-metadata-descriptors;
- means to control a transport stream record and means to reference the content of the XML-metadata-descriptors;
- means to store at least some of said metadata-descriptors into a database, e. g. a DBMS-database;
- means to provide access to a metadata-archive with the help of a query and browsing mechanism via a graphical user interface ;
- means to organize and structure the editing mechanism and the record control means;
- means to record the transport stream on a storage medium, e. g. a disc;
- means to record the navigation files from the DBMS-database on a storage medium, e. g. a disc.

[0022] The invention can also be used at the procedure of generating play-lists and enabling easy edit operations. Also, event-controlled recording can be generated, and easy edit operations are feasible.

[0023] Advantageous additional embodiments of the invention are disclosed in the respective dependent claims.

Drawing

[0024] Exemplary embodiments of the invention are described with reference to the accompanying drawing, which show in:

Fig. 1 Simple Block Diagram of the Invention.

Exemplary embodiments

[0025] Fig. 1 shows the principle of the invention. First, data originated from a Content Provider (e. g. from the Internet) 111 or from a DVB-source 112 are received. In the second step the received data are being parsed 121, 122. The data originated from a DVB-source are being parsed 122 and can be diverted to a transport stream recording device 123, which will file these parsed DVB-data to a storage medium. The parsed data are then led to an XML-Transformer 13, which will control the Record Control 14 and make the Content Referencing of the XML-Metadata-Descriptors 15. These data are being saved in a database 161, which is in interaction with a Descriptor Query 17 and a Play-List Manager 18. The Navigation Files from the Database 161 are recorded in a Navigation File Record device 162. A GUI 19 will output the data originated from the Descriptor Query 17 and from the Play-List Manager 18. Through the GUI 19 the user is able to manipulate the Record Control 14, which will enable the Transport Stream Record 123 to record the adequate data. These data are hereafter saved to above said storage medium. The purpose of the invention is to provide an application for recording and playback of MPEG-2 transport-streams transmitted via DVB-systems onto optical discs.

Embodiment 1:

[0026] While metadata-descriptors (extracted from the DVB-SI) 112 are being parsed and analysed 122, information will be used for generating trigger-signals 14, e. g. starting-events and ending-events. The timer-controlled recording can be activated, e. g. by a "record-next-event"-button, i. e. wherein the next program can be recorded, with given program-data (e. g. time, duration, channel, etc.).

Embodiment 2:

[0027] Automatic generating of play-lists during the recording-process: A process for automatic generating of a play-list waits for EIT-events and evaluates the running-status of the latest EIT for the selected service. The name of the play-list can be taken from the title of the event, which will be transmitted in the "short_event_descriptor" of the EIT-table.

Embodiment 3:

[0028] TV-Anytime has defined a Content Reference ID (CRID), which allows to identify uniquely TV-content. If the CRID of a recording is known in advance and the CRID is re-transmitted periodically with/within the A/V content, the CRID can be used to generate the same trigger-events (start, end, cut points, etc.) as mentioned in embodiment 1. Together with the trigger-events from embodiment 1, the precision can be therefore enhanced.

Embodiment 4:

[0029] The automatic generation or modification of a play-list can be also done offline, after the recording process is finished, because all the relevant metadata are being stored in the database.

Embodiment 5:

[0030] An easy-editing process for recording can be implemented, owing to the stored metadata. With the help of DVB-SI event-information (EIT, RST) the recording device can suggest cut-points to the user.

[0031] The following edit-operations can be performed by the digital recording / reproduction device:

- Starting-points and ending-points of a movie, which are needed to delete unwanted fragments of unwanted movies;
- Starting-points and ending-points of a movie, which are needed to separate movies recorded in one take. A possible result for DVR can be a RealPlayList per movie.

- Starting-point and ending-point of a movie, needed to check if a movie has been entirely recorded.

Claims

- 5 1. Method for analyzing metadata descriptors by runtime or by a resident metadata-archive stored in a digital recorder, **characterized in that** a resident metadata-archive will contain and update the metadata, wherein following steps are included:
 - 10 - data-streams including metadata are being received and parsed, wherein the metadata are originated from Content, e.g. Internet (111) and/or from DVB-data, e.g. DVB transport stream (112);
 - metadata originated from Content are parsed (121) and metadata originated from DVB are also parsed (122);
 - said metadata are being transformed (13) into XML-metadata-descriptors;
 - 15 - transformed metadata are being used to control (14) a transport stream record and to reference (15) the content of the XML-metadata-descriptors;
 - at least some of said metadata-descriptors are stored into a database, e. g. a DBMS-database (161);
 - the metadata-archive (17) is accessed with a query and a browsing mechanism via a graphical user interface (19);
 - 20 - the graphical user interface (19) organizes and structures the editing mechanism, which is the play-list manager (18), and the record control (14);
 - recording (123) the transport stream on a storage medium, e. g. a disc;
 - navigation files resulting from the DBMS-database are recorded (162) on a storage medium, e. g. a disc.
- 25 2. Method according to claim 1, wherein the metadata-descriptors are used for generating trigger-signals 14, e. g. for starting-events and ending-events.
3. Method according to claim 2, wherein the timer-controlled recording is activated, e. g. by a "record-next-event"-button, wherein the next program is recorded, with given program-data not limited to time, duration, channel, etc.
- 30 4. Method according to claim 1, wherein an automatic generation of play-lists is done after occurrence of EIT-events and evaluation of the running-status of the latest EIT for the selected service.
5. Method according to claim 1, wherein if TV-Anytime CRID, or TV-Anytime Locator, or TV-Anytime IMI of a recording is known in advance and the TV-Anytime CRID, or the TV-Anytime Locator, or the TV-Anytime IMI is re-transmitted
 - 35 periodically with/within the A/V content, the TV-Anytime CRID, or the TV-Anytime Locator, or the TV-Anytime IMI can be used to generate the same trigger-events (start, end, cut points, ...) as mentioned in claim 2, in order to enhance the recording precision.
- 40 6. Method according to one of claims 1-5, wherein an automatic generating or the modifying of a play-list is done offline, after the recording process is finished.
7. Method according to one of claims 1-6, wherein an easy-editing process for recording is implemented, owing to the stored metadata, which suggests cut-points to the user, not limited to the below enumeration:
 - 45 - starting-points and ending-points of a movie, which are needed to delete unwanted fragments of unwanted movies;
 - starting-points and ending-points of a movie, which are needed to separate movies recorded in one take;
 - starting-point and ending-point of a movie, needed to check if a movie has been entirely recorded.
- 50 8. Apparatus for analyzing metadata descriptors by runtime or by a resident metadata-archive stored in a digital recorder, the apparatus including:
 - means (121) to receive and to parse data-streams including metadata from Content (111), e. g. from Internet and/or means (121) to receive and to parse data-streams from DVB-data, e. g. DVB-transport streams (112);
 - 55 - means (13) to transform said metadata into XML-metadata-descriptors;
 - means (14) to control a transport stream record and means (15) to reference the content of the XML-metadata-descriptors;
 - means (161) to store at least some of said metadata-descriptors into a database, e. g. a DBMS-database;

EP 1 361 577 A1

- means (17) to provide access to a metadata-archive with the help of a query and browsing mechanism via a graphical user interface (19) ;
- means (18) to define the structure and the organization of the editing mechanism and of the record control means (14);
- 5 - means (123) to record the transport stream on a storage medium, e. g. a disc;
- means (162) to record the resulting navigation files, which are output by the DBMS-database (161) on a storage medium, e. g. a disc.

10

15

20

25

30

35

40

45

50

55

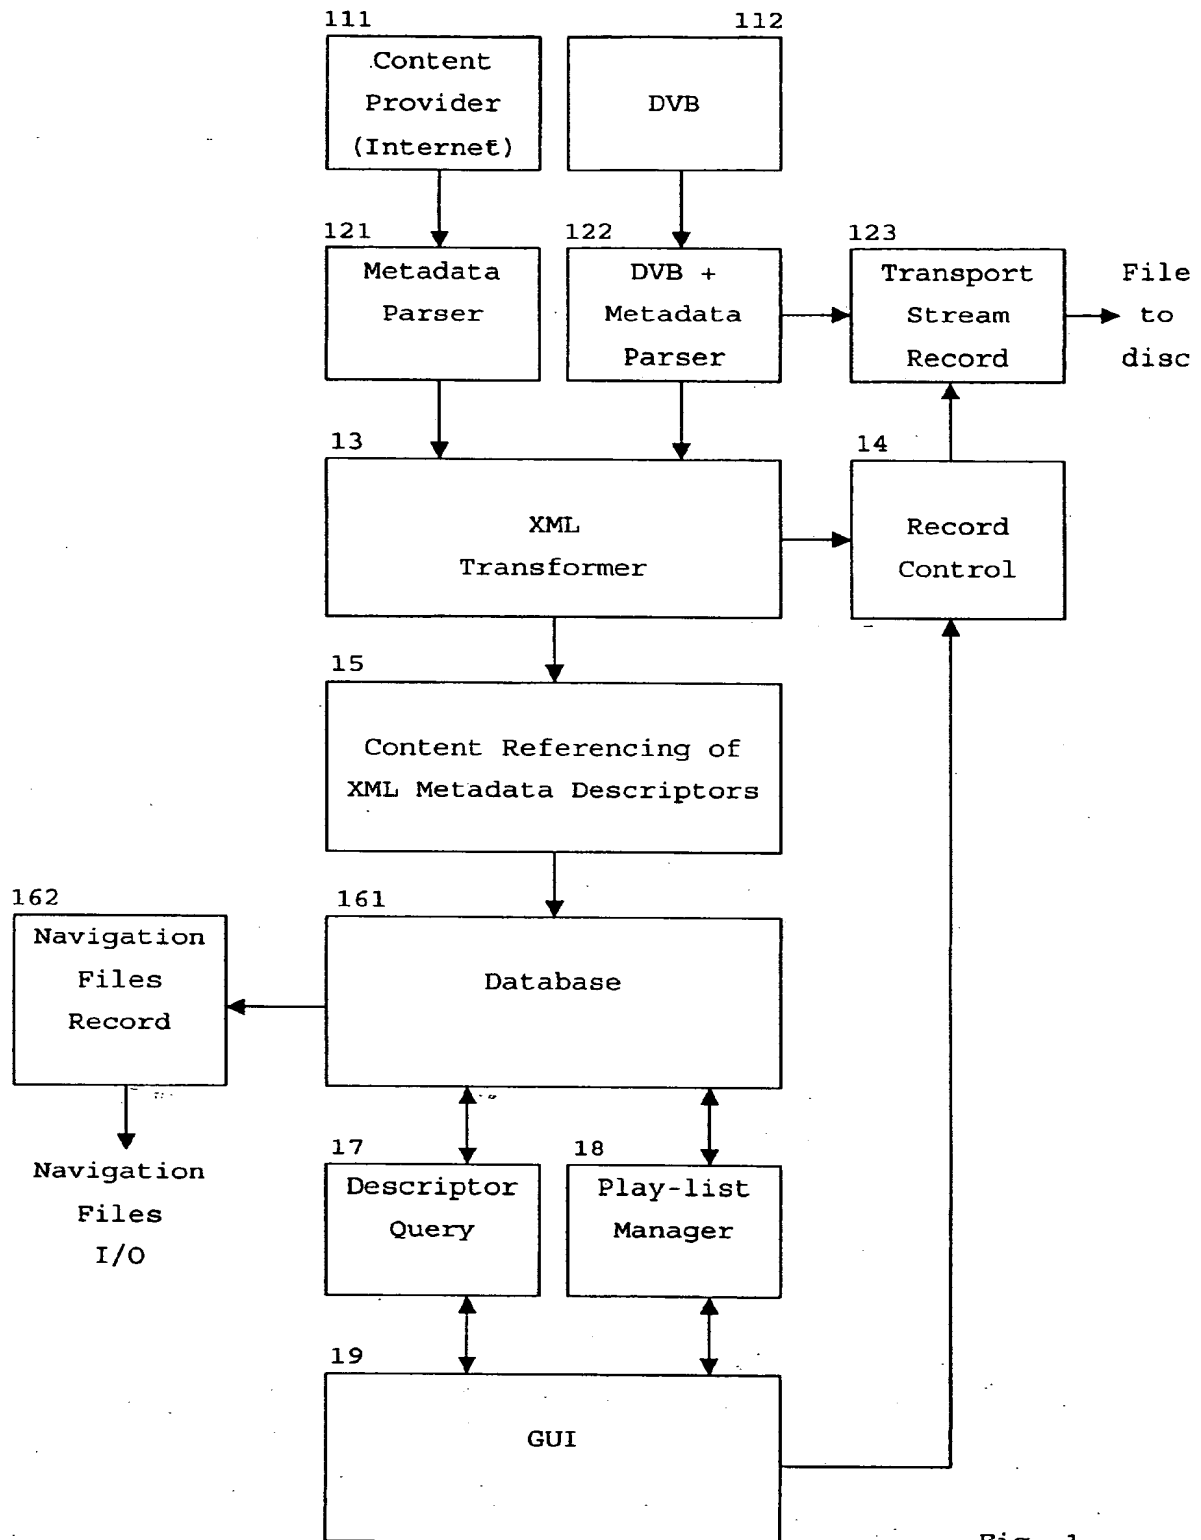


Fig. 1



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 02 01 0390

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	US 2001/014210 A1 (KANG BAE GUEN) 16 August 2001 (2001-08-16) * the whole document *	1,2,8	G11B27/034 G11B27/10 G11B27/32 G11B19/02
A	EP 1 198 133 A (SONY CORP) 17 April 2002 (2002-04-17) * the whole document *	1,2,6-8	H04N7/26 H04N5/781 H04N5/775 H04N5/76
A	EP 1 021 048 A (TOKYO SHIBAURA ELECTRIC CO) 19 July 2000 (2000-07-19) * the whole document *	1,2,6-8	
A	WO 00 14744 A (KEESEN HEINZ WERNER ; THOMSON BRANDT GMBH (DE); SCHILLER HARALD (DE) 16 March 2000 (2000-03-16) * the whole document *	1,6-8	
D,A	EP 1 103 974 A (SONY CORP) 30 May 2001 (2001-05-30) * the whole document *	1,8	
A	PFEIFFER S ET AL: "TV ANYTIME AS AN APPLICATION SCENARIO FOR MPEG-7" PROCEEDINGS ACM MULTIMEDIA 2000 WORKSHOPS. MARINA DEL REY, CA, NOV. 4, 2000, ACM INTERNATIONAL MULTIMEDIA CONFERENCE, NEW YORK, NY: ACM, US, vol. CONF. 8, 4 November 2000 (2000-11-04), pages 89-92, XP001003701 ISBN: 1-58113-311-1 * the whole document *	1,5-8	TECHNICAL FIELDS SEARCHED (Int.Cl.7) G11B H04N G06F
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 27 March 2003	Examiner Daalmans, F
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03.02 (P04C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 02 01 0390

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	"IST-1999-11702: myTV - personalised services for digital television, Final Report, March-2002, pages 1-23," XP002220956 Retrieved from the Internet: <URL: http://www.extra.research.philips.com/euprjects/mytv/myTV%20Final%20project%20o > [retrieved on 2002-11-11] * the whole document *	1,5,8	
A	EP 1 003 304 A (SONY CORP) 24 May 2000 (2000-05-24) * the whole document *	1,4,8	
A	CECCARELLI M ET AL: "Home multimedia systems: on personal video libraries" MULTIMEDIA COMPUTING AND SYSTEMS, 1999. IEEE INTERNATIONAL CONFERENCE ON FLORENCE, ITALY 7-11 JUNE 1999, LOS ALAMITOS, CA, USA, IEEE COMPUT. SOC, US, 7 June 1999 (1999-06-07), pages 1082-1085, XP010342599 ISBN: 0-7695-0253-9 * the whole document *	1,8	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
Place of search THE HAGUE		Date of completion of the search 27 March 2003	Examiner Daalmans, F
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons</p> <p>& : member of the same patent family, corresponding document</p>			

EPO FORM 1503 (03.92) (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 02 01 0390

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

27-03-2003

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
US 2001014210	A1	16-08-2001	KR	2001068851 A	23-07-2001
			CN	1312650 A	12-09-2001

EP 1198133	A	17-04-2002	EP	1198133 A1	17-04-2002
			US	2002145702 A1	10-10-2002
			CN	1383679 T	04-12-2002
			WO	0182610 A1	01-11-2001
			JP	2002158974 A	31-05-2002

EP 1021048	A	19-07-2000	EP	1021048 A2	19-07-2000
			JP	2000268537 A	29-09-2000
			JP	2002191024 A	05-07-2002
			JP	2002175670 A	21-06-2002
			JP	2002165187 A	07-06-2002
			JP	2002157840 A	31-05-2002
			JP	2002175671 A	21-06-2002
			US	2001009604 A1	26-07-2001
			US	2001010755 A1	02-08-2001
			US	2001009605 A1	26-07-2001
			US	2001012443 A1	09-08-2001
			US	2001014201 A1	16-08-2001

WO 0014744	A	16-03-2000	EP	0991072 A1	05-04-2000
			EP	0986062 A1	15-03-2000
			AT	227465 T	15-11-2002
			AU	5742899 A	27-03-2000
			AU	5854999 A	27-03-2000
			BR	9913509 A	05-06-2001
			CA	2339620 A1	16-03-2000
			CA	2339680 A1	16-03-2000
			CN	1313991 T	19-09-2001
			CN	1317139 T	10-10-2001
			DE	69903839 D1	12-12-2002
			DE	69903839 T2	27-02-2003
			WO	0014743 A1	16-03-2000
			WO	0014744 A1	16-03-2000
			EP	1112573 A1	04-07-2001
			EP	1112574 A1	04-07-2001
			HU	0103880 A2	28-02-2002
			HU	0104005 A2	28-03-2002
			JP	2002524814 T	06-08-2002
			JP	2002524815 T	06-08-2002
			NZ	510243 A	25-10-2002
			PL	346464 A1	11-02-2002
			PL	346465 A1	11-02-2002
			TR	200100596 T2	21-06-2001

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 02 01 0390

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

27-03-2003

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
WO 0014744	A		TW	463165 B	11-11-2001

EP 1103974	A	30-05-2001	JP	2001157145 A	08-06-2001
			CN	1310445 A	29-08-2001
			EP	1103974 A2	30-05-2001

EP 1003304	A	24-05-2000	EP	1003304 A1	24-05-2000
			CN	1272272 T	01-11-2000
			WO	9959290 A1	18-11-1999

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.